


# HYDRAULIC PULLER

## 107R8

HYDRAULIC PULLER 90 KN CAPACITY FOR SINGLE ROPE PULLING ON OVERHEAD STRINGING OPERATIONS AS WELL AS UNDERGROUND CABLING.



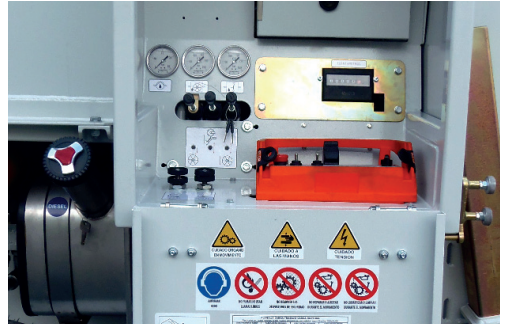

## PERFORMANCE & CHARACTERISTICS

### Performance

Max pull	90 kN
Speed at max pull	2 km/h
Max speed	5 km/h
Pull at max speed	36 kN

### Characteristics

Bull-Wheels diameter	600 mm
Max rope diameter	24 mm
Weight	3400 kg

### Engine

Diesel	(125 Hp) 93 kW
Cooling	liquid
Starter	Electrical

## FEATURES & OPTIONAL

### Standard features

- 1 hydraulic circuit with negative brake system
- 1 dynamometer for direct reading of pulling value with load-limiter device
- Thermally treated steel bull-wheels
- Automatic reel-winder suitable for steel reel 1100÷1400 mm
- Wired remote control unit c/w console
- Rigid axle with tyres for towing up to 30 km/h
- Balanced top lifting point and anchoring attachments

### Optional equipment

01-PW	Preset for digital data recorder, counter-meter and speedometer
04-PW	Wireless remote control unit c/w console
05-PW	Rope holder clamp (hydraulic)
06-PW	Roller guiding device for Underground laying
07-PW	Hydraulic power take-off for remote reel-winder

### Special features upon request

13-PW	Pre-heater (up to -30°C)
18-PW	Counter-meter device
20-PW	Dynamic speed pulling force control

## OVERALL DIMENSIONS

